


PASSIVE MODULE WITH D-SUB CONNECTORS

Features

- Available in 9/15/25/37/50 Pin Male & Female Connectors
- With Screw Terminals, Spring Terminals on request.
- Mountable on Universal DIN Rail.

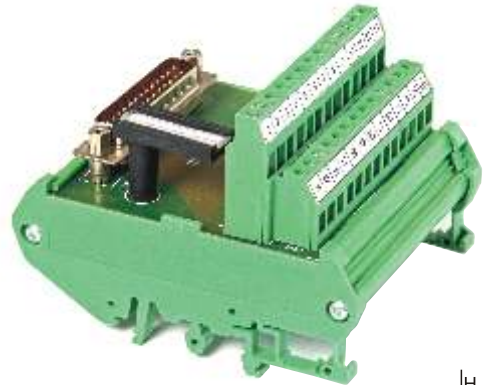

TECHNICAL INFORMATION

GENERAL DATA

Number of Channels / Pins	9 to 50
Ambient operating temperature	0°C to 50°C
Housing material	PVC/V0 Grade, Phoenix Contact or equivalent
Housing color	Green
Conformal coating	Insulate, protect and seal electronic parts, available on request
RoHS compliant	All the components used including PCBs are RoHS approved

INPUT DATA

Input voltage	24V AC/DC
Maximum current carrying capacity	2A per pin


CONNECTION DATA

Connection -1	PCB Terminals Screw (Nominal current: 22A, Rated voltage: 250V, Type of connection: Screw connection)
Cross section of permissible wire	Solid Min/Max: 0.2/4.0 mm ² Stranded Min/Max: 0.2 / 2.5 mm ²
Make	Phoenix Contact or equivalent
Connection -2	D-Sub connector
Make	Omron or equivalent

ORDERING INFORMATION

Passive Module with D-Sub Male Connectors			Passive Module with D-Sub Female Connectors		
Article Nos.	Descriptions	Dimension LxWxH (mm)	Article Nos.	Descriptions	Dimension LxWxH (mm)
11100116	AE-PM-D-SUB-09M	37 x 90 x 66	11100121	AE-PM-D-SUB-09F	37 x 90 x 66
11100117	AE-PM-D-SUB-15M	57 x 90 x 66	11100122	AE-PM-D-SUB-15F	57 x 90 x 66
11100118	AE-PM-D-SUB-25M	76 x 90 x 66	11100123	AE-PM-D-SUB-25F	76 x 90 x 66
11100119	AE-PM-D-SUB-37M	110 x 90 x 66	11100124	AE-PM-D-SUB-37F	110 x 90 x 66
11100120	AE-PM-D-SUB-50M	107 x 90 x 66	11100125	AE-PM-D-SUB-50F	107 x 90 x 66

Layout Diagram of AE-PM-D-SUB-37M

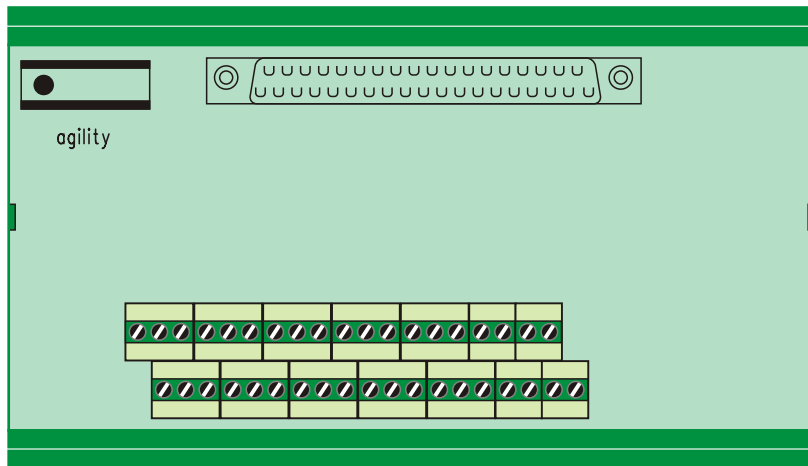

Connection Diagram of AE-PM-D-SUB-37M

