


G3VM-□AR□/□DR□

MOS FET Relays DIP 4-pin, High-current and Low-ON-resistance Type

MOS FET Relays in DIP 4-pin packages that achieve the low ON resistance and high switching capacity of a mechanical relay

- Load voltage: 20 V, 30V, 40 V, 60 V, 100 V, or 200 V
- 20-V Relay: Continuous load current of 3 A max.
- 30-V Relay: Continuous load current of 4 A max.
- 40-V Relay: Continuous load current of 2.5 A max.
- 60-V Relay: Continuous load current of 3 A max.
- 100-V Relay: Continuous load current of 2 A max.
- 200-V Relay: Continuous load current of 0.7 A max.



Note: The actual product is marked differently from the image shown here.


RoHS Compliant

Application Examples


- Communication equipment
- Security equipment
- Power circuit
- Test & Measurement equipment
- Industrial equipment

Package (Unit : mm, Average)

DIP 4-pin
PCB Terminals



Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage

- 2: 20 V
- 3: 30 V
- 4: 40 V
- 6: 60 V
- 10: 100 V
- 20: 200 V

4. Additional functions

R: Low ON resistance

2. Contact form

1: 1a (SPST-NO)

3. Package

A: DIP 4-pin with PCB terminals
D: DIP 4-pin with surface-mounting terminals

5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging			Tape packaging	
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB Terminals	Surface-mounting Terminals		Surface-mounting Terminals	
DIP4	1a (SPST-NO)	20 V	3 A	G3VM-21AR	G3VM-21DR	100 pcs.	G3VM-21DR(TR)	1,500 pcs.
		30 V	4 A	G3VM-31AR	G3VM-31DR		G3VM-31DR(TR05)	500 pcs.
		40 V	2.5 A	G3VM-41AR	G3VM-41DR		G3VM-41DR(TR)	1,500 pcs.
		60 V	2 A	G3VM-61AR	G3VM-61DR		G3VM-61DR(TR)	1,500 pcs.
			3 A	G3VM-61AR1	G3VM-61DR1		G3VM-61DR1(TR05)	500 pcs.
		100 V	1 A	G3VM-101AR	G3VM-101DR		G3VM-101DR(TR)	1,500 pcs.
			2 A	G3VM-101AR1	G3VM-101DR1		G3VM-101DR1(TR05)	500 pcs.
		200 V	0.7 A	G3VM-201AR	G3VM-201DR		G3VM-201DR(TR05)	500 pcs.

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	G3VM-21AR	G3VM-31AR	G3VM-41AR	G3VM-61AR	G3VM-61AR1	G3VM-101AR	G3VM-101AR1	G3VM-201AR	Unit	Measurement conditions	
		G3VM-21DR	G3VM-31DR	G3VM-41DR	G3VM-61DR	G3VM-61DR1	G3VM-101DR	G3VM-101DR1	G3VM-201DR			
Input	LED forward current	30									mA	
	Repetitive peak LED forward current	1									A	100 μs pulses, 100 pps
	LED forward current reduction rate	-0.3									mA/°C	Ta ≥ 25°C
	LED reverse voltage	5	6	5	6	5	6	5	6	V		
	Connection temperature	125									°C	
Output	Load voltage (AC peak/DC)	20	30	40	60	60	100	100	200	V		
	Continuous load current (AC peak/DC)	3	4	2.5	2	3	1	2	0.7	A		
	ON current reduction rate	-30	-40	-25	-20	-30	-10	-20	-7	mA/°C	Ta ≥ 25°C	
	Pulse ON current	9	9	7.5	6	9	3	6	2.1	A	t=100 ms, Duty=1/10	
	Connection temperature	125									°C	
Dielectric strength between I/O *	Vi-o	2,500									Vrms	AC for 1 min
Ambient operating temperature	Ta	-40 to +85	-40 to +110	-40 to +85		-40 to +110	-40 to +85	-40 to +110		°C	With no icing or condensation	
Ambient storage temperature	Tstg	-55 to +125										°C
Soldering temperature	-	260									°C	10 s


* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

DIP G3VM-□AR□/□DR□

Electrical Characteristics (Ta = 25°C)

Item	Symbol		G3VM-21AR	G3VM-31AR	G3VM-41AR	G3VM-61AR	G3VM-61AR1	G3VM-101AR	G3VM-101AR1	G3VM-201AR	Unit	Measurement conditions
			G3VM-21DR	G3VM-31DR	G3VM-41DR	G3VM-61DR	G3VM-61DR1	G3VM-101DR	G3VM-101DR1	G3VM-201DR		
Input	LED forward voltage	Minimum	1.18	1.5	1.18		1.5	1.18	1.5		V	If=10 mA
		Typical	1.33	1.64	1.33		1.64	1.33	1.64			
		Maximum	1.48	1.8	1.48		1.8	1.48	1.8			
	Reverse current	IR	Maximum	10						μA	VR=5 V	
	Capacitance between terminals	CT	Typical	70						pF	V=0, f=1 MHz	
Trigger LED forward current	IFT (Ifc)	Typical	0.7	0.3	0.5		0.3	0.5	0.4	0.3	mA	G3VM-201AR/201DR: Io=0.7A Others: Io=1A
		Maximum	3									
Release LED forward current	IFC (IfT)	Minimum	0.1						mA	IoFF=10 μA		
		Typical	0.1	0.2	0.1		0.2	0.1			0.2	
Maximum resistance with output ON	RON	Typical	40	25	50	80	45	250	110	900	mΩ	G3VM-31AR/31DR: If=5mA, t<1s, Io=4A G3VM-61AR1/61DR1: If=5mA, t<1s, Io=3A G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR1/101DR1: If=5mA, t<1s, Io=2A G3VM-101AR/101DR: If=5mA, t<1s, Io=1A G3VM-201AR/201DR: If=5mA, t<1s, Io=0.7A
		Maximum	80	50	150	200	100	700	200	2000		
Current leakage when the relay is open	ILEAK	Typical	-	0.01	-		0.005	-	0.01	0.04	μA	VoFF=Load voltage ratings
		Maximum	1									
Capacitance between terminals	COFF	Typical	300	450	300	250		200	110		pF	V=0, f=1 MHz
Capacitance between I/O terminals	CI-O	Typical	0.8						pF	f=1 MHz, Vs=0 V		
Insulation resistance between I/O terminals	RI-O	Minimum	1000						MΩ	Vi-o=500 VDC, RoH≤60%		
		Typical	10 ⁸									
Turn-ON time	tON	Typical	1	0.6	0.8		0.45	0.8	0.4	0.13	ms	If=5 mA, RL=200 Ω, VDD=20 V *
		Maximum	5	3	5		2	5	2	1		
Turn-OFF time	tOFF	Typical	0.3			0.2	0.3	0.2	0.14		ms	If=5 mA, RL=200 Ω, VDD=20 V *
		Maximum	1			0.5						

* Turn-ON and Turn-OFF Times

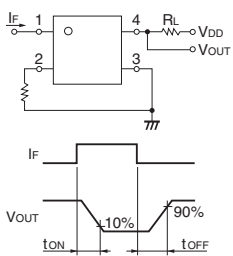

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol		G3VM-21AR	G3VM-31AR	G3VM-41AR	G3VM-61AR	G3VM-61AR1	G3VM-101AR	G3VM-101AR1	G3VM-201AR	Unit	
			G3VM-21DR	G3VM-31DR	G3VM-41DR	G3VM-61DR	G3VM-61DR1	G3VM-101DR	G3VM-101DR1	G3VM-201DR		
Load voltage (AC peak/DC)	V _{DD}	Maximum	16	24	32	48		80		160	V	
		Minimum	5									
Operating LED forward current	I _F	Typical	10									
		Maximum	25									
Continuous load current (AC peak/DC)	I _o	Maximum	3	4	2.5	2	3	1	2	0.7	A	
Ambient operating temperature	T _a	Minimum	-20									
		Maximum	65	85	65		85	65	85			°C


■Spacing and Insulation

Item	Minimum	Unit
Creepage distances	7.0	mm
Clearance distances	7.0	
Internal isolation thickness	0.4	


Engineering Data

LED forward current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

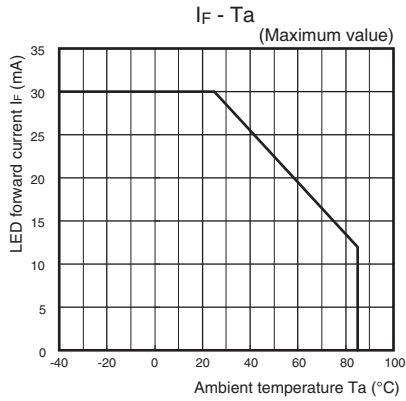


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

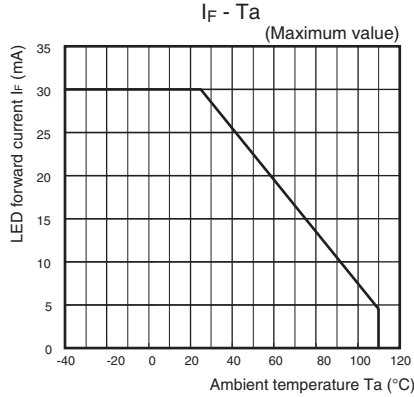


Continuous load current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

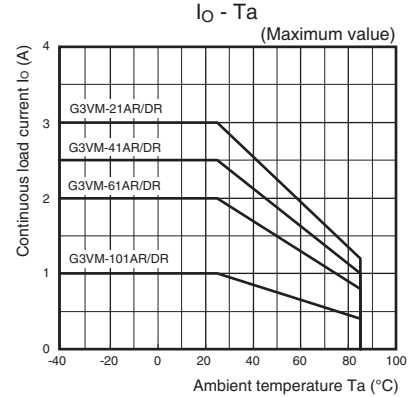


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

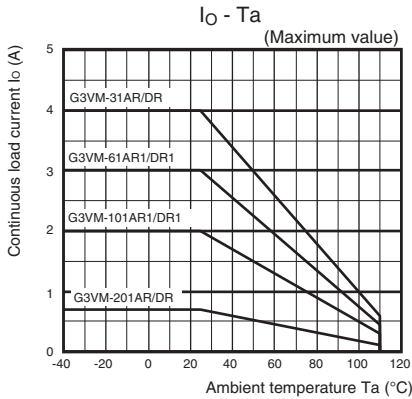


LED forward current vs. LED forward voltage

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

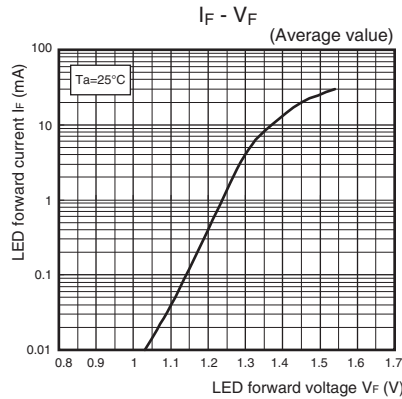


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

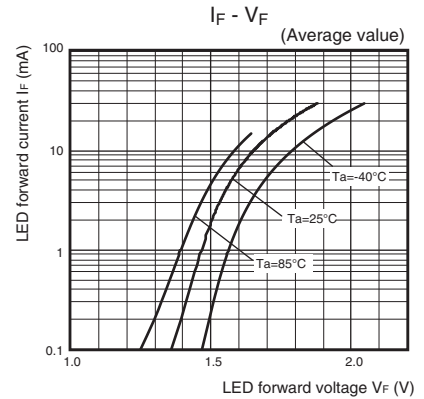


Continuous load current vs. On-state voltage


G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

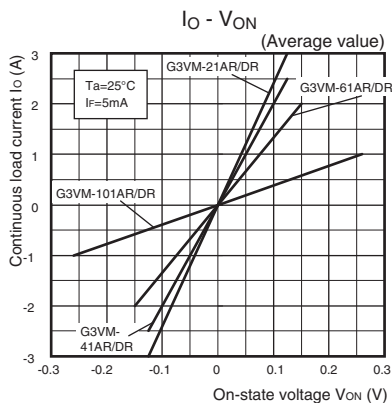

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1

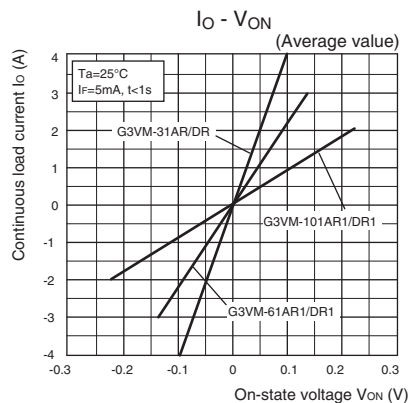


G3VM-201AR/201DR

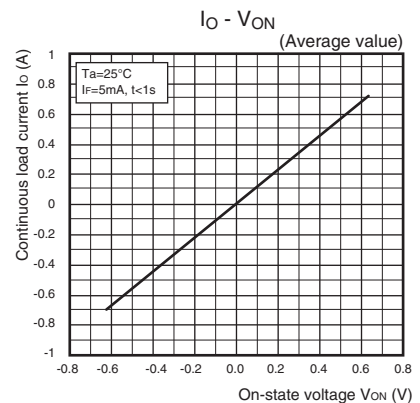


Engineering Data

On-state resistance vs. Ambient temperature


G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

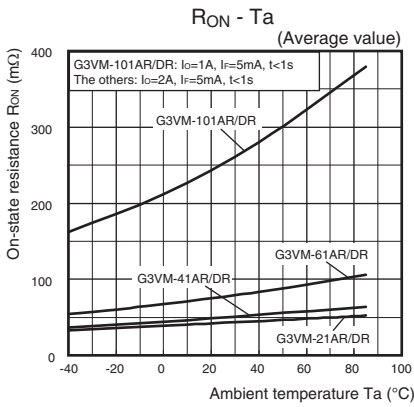

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

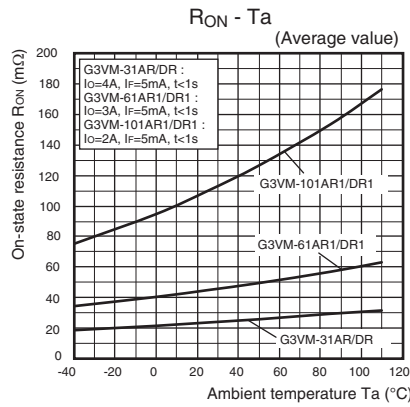


G3VM-201AR/201DR

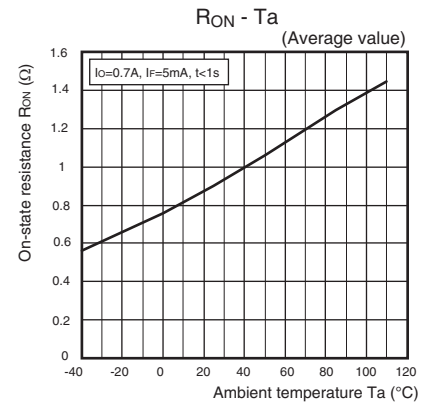


Trigger LED forward current vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

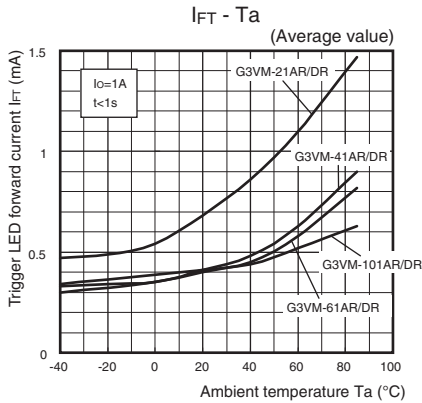


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

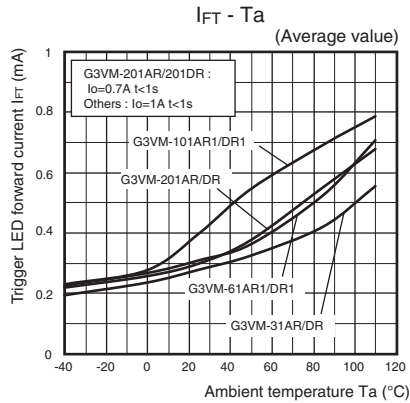


Turn ON, Turn OFF time vs. LED forward current


G3VM-21AR/21DR/41AR/41DR

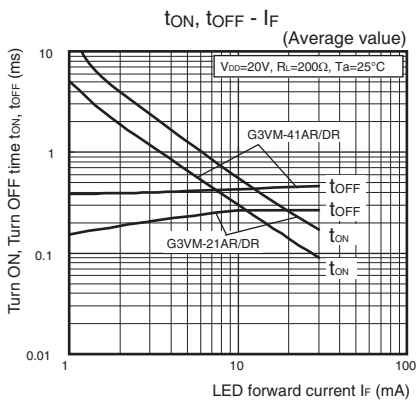

G3VM-61AR/61DR/101AR/101DR

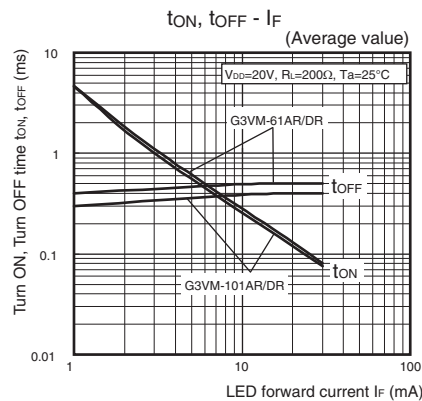


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

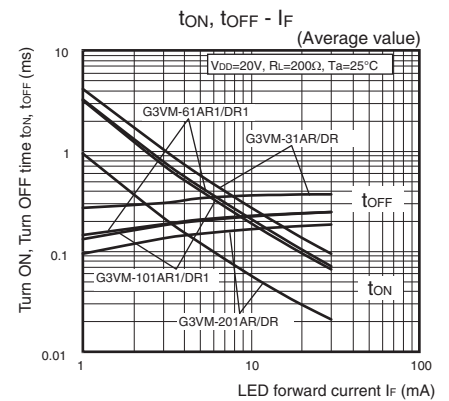


Engineering Data

● Turn ON, Turn OFF time vs. Ambient temperature


G3VM-21AR/21DR/41AR/41DR

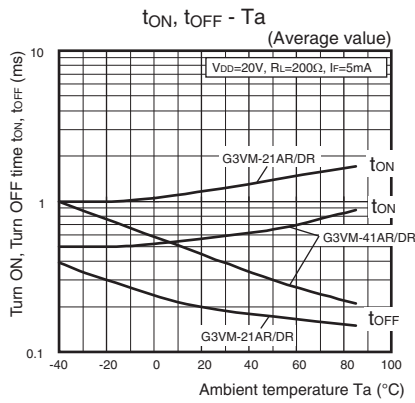

G3VM-61AR/61DR/101AR/101DR

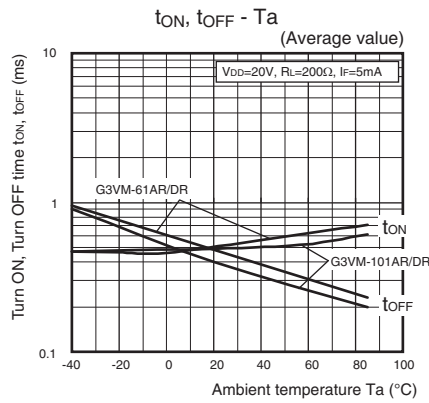


G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

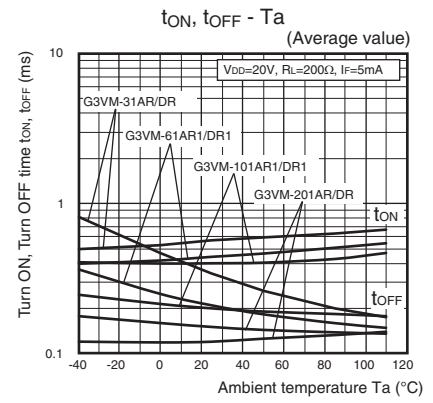


● Current leakage vs. Ambient temperature

G3VM-21AR/21DR/41AR/41DR/61AR/61DR/101AR/101DR

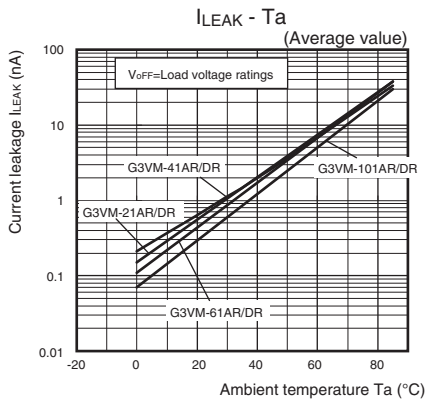

G3VM-31AR/31DR/61AR1/61DR1/101AR1/101DR1/201AR/201DR

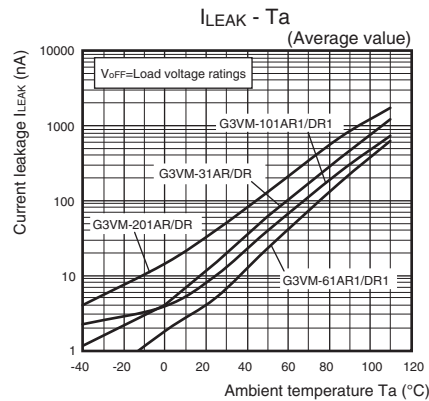

DIP


G3VM-□AR□/□DR□

■ Appearance / Terminal Arrangement / Internal Connections


● Appearance

DIP (Dual In-line Package)

DIP 4-pin

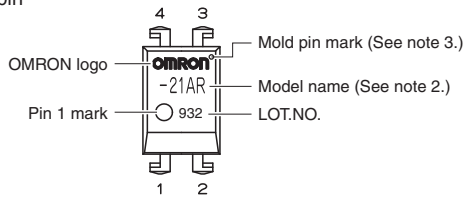

● Terminal Arrangement/Internal Connections (Top View)




Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.


Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

■ Dimensions (Unit: mm)




PCB Terminals

Weight: 0.25 g

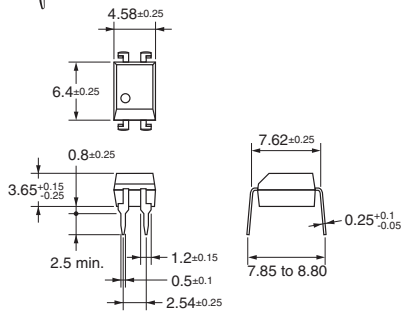


Surface-mounting Terminals

Weight: 0.25 g

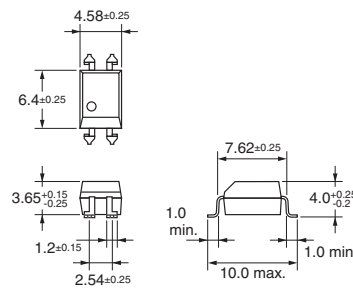


PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■ Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

■ Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

DIP

G3VM-□AR□/□DR□

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>